

# Product Profiles



Jobsite Tough  
Foam Generator  
Systems

## LEGEND

ie. T20-5

- T= Enclosed Tank
- OT = Open Top Tank
- 20 = Tank Capacity in Gallons
- 5 = Rate of discharge in CFM



**CELLULAR<sup>TM</sup>  
CONCRETE LLC**


MEARLCRETE<sup>®</sup> DIVISION  
7020 Snowdrift Road, Suite 102  
Allentown, PA 18106  
Ph: 610.398.7833  
Fax: 610.398.7050  
info@cellular-concrete.com  
www.cellular-concrete.com



**Pressure Tank Assemblies:**

Pressure tank units may be sized for any reasonable production rate for use with either continuous or batch mixing systems. Pressure tanks are supplied in sizes from 10 to 200 gallon capacity to accommodate the work anticipated.

Where continuous use is desired, two tanks of equal size may be coupled together in parallel so one may be discharging while the second is being charged with foam concentrate and water. Calibrated foam nozzles with fixed foam discharge rates from 1 to 40 CFM or faster are available.

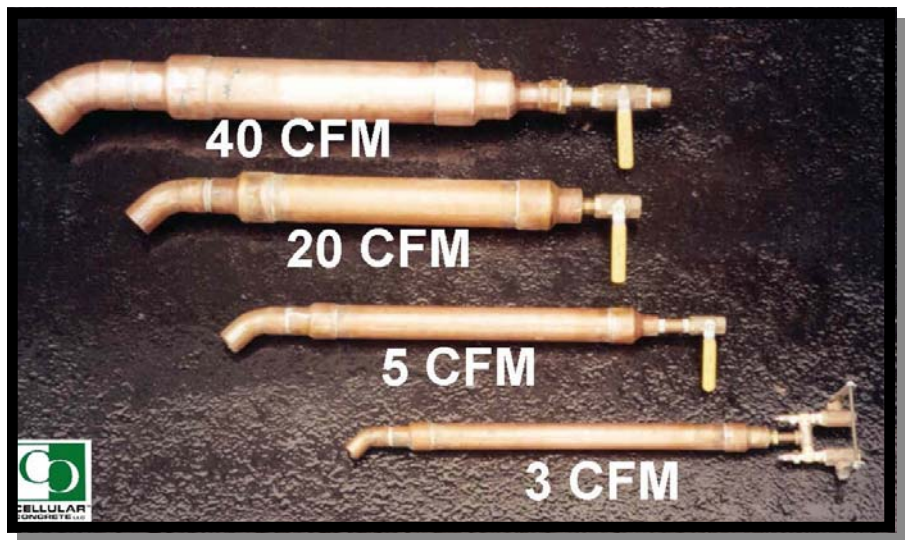

Standard or Custom Systems Built to Your Specifications



**CELLULAR CONCRETE**™  
LLC  
MEARLCRETE® DIVISION

421 Schantz Road · Allentown, PA 18104 USA  
610 398-7833 · Fax: 610 398-7050  
[info@cellular-concrete.com](mailto:info@cellular-concrete.com) [www.cellular-concrete.com](http://www.cellular-concrete.com)